



## Product Description: LBST0727A (0.7 GHz ~ 2.7 GHz Bias-T)



LiConn has developed super wide band Bias-T with low cost. The bias-T offers maximum 0.5 dB insertion loss and maximum 1.25:1 VSWR throughout 0.7 GHz to 2.7 GHz frequency band.

The Bias-T can be used in varieties of circuitries such as wide band amplifiers, broadcast, and measurement. The bias-T is designed to meet MIL-STD-202g.

## Key Performance

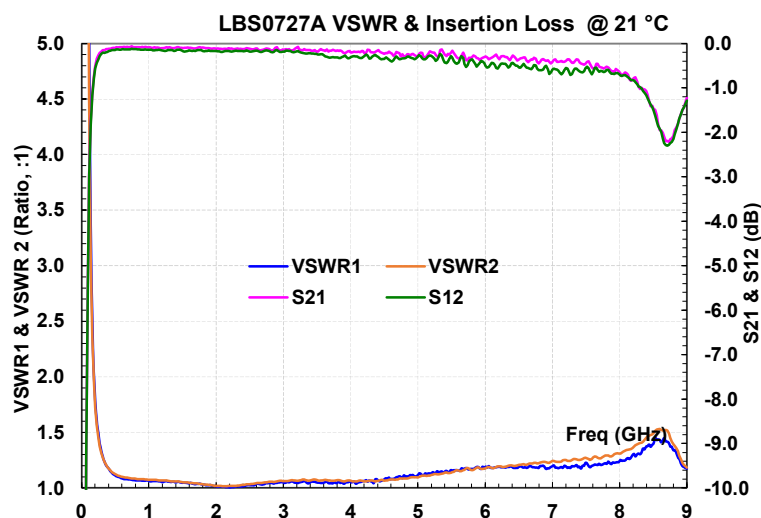

- 0.7 GHz ~ 2.7 GHz
- Max 1.25:1 VSWR
- Typical 0.25 dB Insertion Loss
- Max 0.5 dB Insertion Loss
- 100 Volts DC Voltage Rating
- 40 dB RF/DC Isolation
- SMA Connector I/O
- Miniature Size
- RoHS/REACH Compliant
- EAR99

## Ordering Information


Model Number	RF Port	RF+DC Port
LBST0727A-1	SMA Female	SMA Male
LBST0727A-2	SMA Male	SMA Female
LBST0727A-3	SMA Male	SMA Male
LBST0727A-4	SMA Female	SMA Female

## Absolute Maximum Ratings

Parameters	Units	Ratings
RF Average Power	W	50
Maximum DC Voltage Rating	V	100
Maximum DC Current	mA	170
RF/DC Isolation	dB	40
Operating Temperature	°C	-54 ~ +85
Storage Temperature	°C	-65 ~ +150

\*Operation beyond any one of these parameters may cause permanent damage.

## Outline

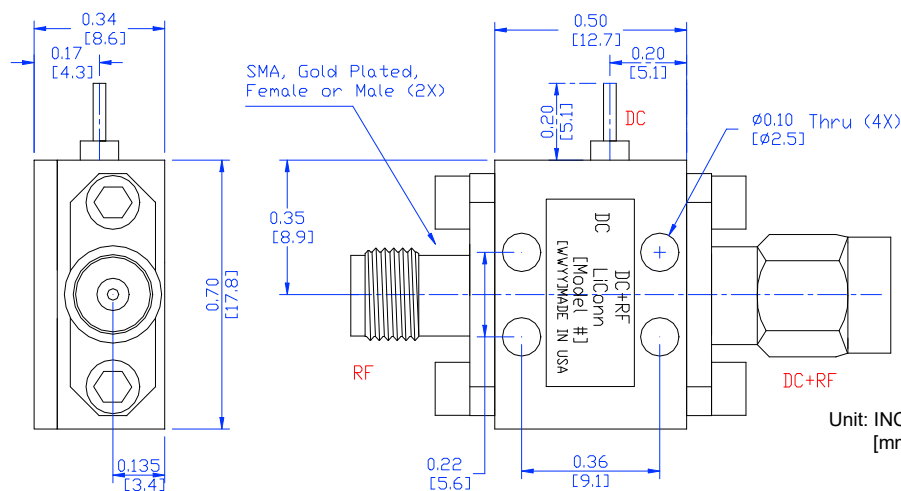

Unit: INCH Base Material: Brass  
 [mm] Finish: Gold Plating  
 Tolerance: X.XXX ±0.005"  
 X.XX ±0.01"



Tel: 1-651-482-1848  
 Fax: 1-651-482-1573  
[sales@liconn.com](mailto:sales@liconn.com)

Rev 1.1  
 © Copyright 2025 LiConn, Inc.  
 Specifications and information are subject to change without notice.  
 For latest product information, please visit [www.liconn.com](http://www.liconn.com)